


## 14-350 Removal and installation of exhaust manifold

---

### C. National version with exhaust gas recirculation

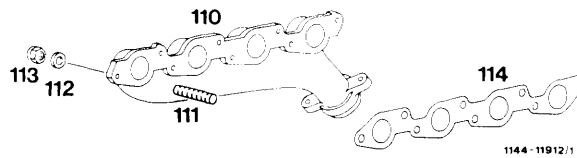

Clamp (119) . . . . .	replace.
Nut (113) . . . . .	8, 10 or 12 off Cu M 8, replace, 25 Nm.
Washer (112) . . . . .	8, 10 or 12 off to item 113.
Exhaust manifold (110) . . . . .	remove, reinstall.
Threaded studs in cylinder head (111) . . . . .	8, 10 or 12 off, if damaged, replace, 12 Nm.
Gasket (114) . . . . .	replace.
Flexible pipe (61) . . . . .	remove, reinstall.
Exhaust gas recirculation valve (60) . . . . .	remove, reinstall.
Exhaust gas recirculation line (120) . . . . .	remove, reinstall.