


14-350 Removal and installation of exhaust manifold - Turbodiesel

Preliminary operation
Turbocharger removed (09-150)

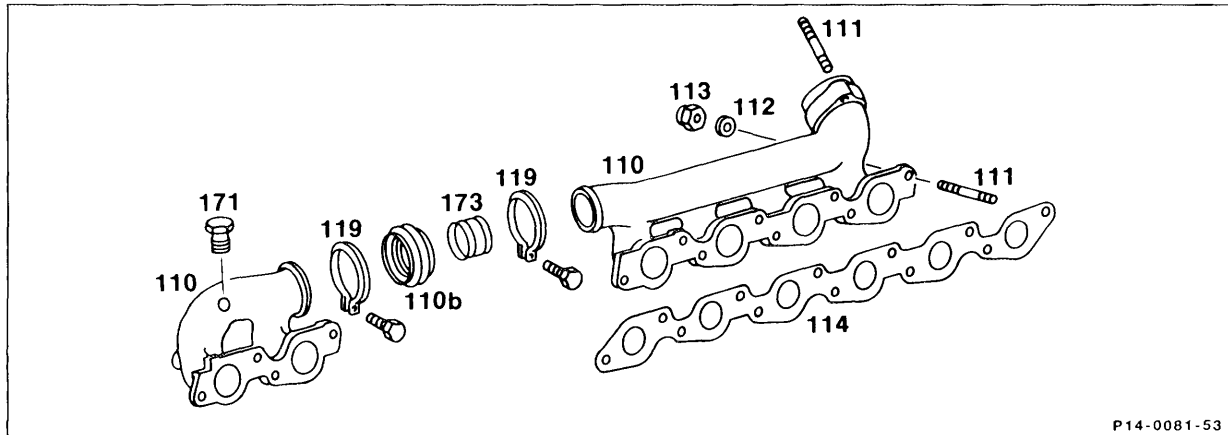

P14-0081-53

Clip (119, 2 off)	loosen.
Nut (113, 12 off)	replace, 25 Nm.
Washer (112, 12 off)	remove, install.
Metal hose (110 b)	remove, install.
Pipe (173)	remove, install.
Screw plug (171)	remove, install.
Exhaust manifold (110)	2-piece, remove, install.
Gasket (114)	replace.
Stay pin in cylinder head (111, 12 off)	check, replace if required.