



Motor Oil Diesel Oil Motorcycle Oil PowerSports Oil Gear Lubes Transmission Fluid Hydraulic Oil Compressor Oil Grease AGGRAND

Filters By-Pass Fuel Additives Maintenance Wiper Blades Plugs & Wires Appearance Literature Clothing / Promotional Services

HOME ONLINE STORE WHAT'S NEW RACING COMPANY INFO OPPORTUNITIES CONTACT US

FIND AN AMSOIL DEALER NEAR YOU

AMSOIL Synthetic Multi-Vehicle Transmission Fluid

Account Zone

Login To Your Account
Create A New Account
First Time Logging In
Forgot Password?

Online Store

Checkout
View Shopping Cart
Shipping Information

Account Information

Preferred Customers SAVE!
Dealership Information
FREE Online Catalog

Other Links

Racing Blog
Events Blog
Event Sponsorships
Testimonials
FAQs
MyAMSOILGarage



Synthetic Multi-Vehicle Automatic Transmission Fluid (ATF)

Outstanding performance in domestic and import cars, trucks, SUVs and commercial vehicles.

[See Pricing Information or Place an Order](#)

Package sizes include:

1-Quart Bottle
1-Quart Bottles (case of 12)
1-Gallon Bottle
1-Gallon Bottle (case of 4)
2.5-Gallon Bottle
2.5-Gallon Bottles (case of 2)
30-Gallon Drum
55-Gallon Drum

Transmission Fluid Evacuation Service:

[Bulletin From Filter Manufacturers Council](#) (16k PDF)

[ATF and Transmission Filter Change Procedures](#) (45k PDF)

[AMSOIL Transmission fluid recommendations for Cars and Light Duty Trucks](#)

AMSOIL Synthetic Multi-Vehicle Automatic Transmission Fluid (ATF) is engineered to outperform conventional automatic transmission fluids and exceed the performance requirements of most North American, European and Asian vehicles. This sophisticated formulation provides outstanding performance and protection in the severe operating conditions of today's most advanced transmission designs. Automatic transmissions have become increasingly complex as vehicle manufacturers strive to improve efficiency while satisfying consumer demands. Smaller, smoother-shifting transmissions with longer fluid-life capabilities and heavier load capacities are now standard in modern transmission design. Traditional ATFs, however, are unable to meet these extreme requirements, and new fluids have emerged with each new advancement in transmission engineering. AMSOIL first introduced a synthetic automatic transmission fluid in 1980 and remains the leader in transmission fluid quality. AMSOIL Synthetic Multi-Vehicle ATF is formulated with the highest-quality synthetic fluids and additives. It exceeds the most stringent industry standards and is recommended for a wide range of transmissions. AMSOIL Synthetic Multi-Vehicle ATF reduces confusion, misapplications and inventories. It eliminates the need for costly and suspect "one-treatment-covers-all" additives. The quality and performance of AMSOIL Synthetic Multi-Vehicle ATF is guaranteed.

Fully Fortified

- Anti-wear/extreme-pressure agents (extend gear life)
- Durable friction modifiers (anti-shudder)
- Anti-oxidants (extend fluid life)
- Seal conditioners (reduce leaks)
- Detergents and dispersants (keep clean and control deposits)
- Corrosion inhibitors (control rust)
- Anti-foam agents (improve hydraulic function)

Exceptional Hot- and Cold-Temperature Performance

Thermal Stability – Hot temperatures are no excuse for poor reliability. Naturally heat resistant and heavily fortified with anti-oxidants, AMSOIL ATF exceeds the most demanding oxidation requirements. AMSOIL ATF delivers outstanding protection against sludge and varnish deposits that clog narrow oil passages and contribute to clutch glazing. Transmissions can operate hotter and longer with AMSOIL ATF than with conventional fluids.

Cold-Temperature Fluidity – Cold, thick automatic transmission fluid lengthens shift times and reduces energy efficiency (fuel economy). AMSOIL Synthetic Multi-Vehicle ATF is waxfree and delivers extraordinary cold-flow properties (< -60°F pour point). Shifting is more responsive, energy efficiency is improved and warm-up times are reduced.

Outstanding Wear Protection

Varying speeds and loads causes torque multiplication and extreme stress on gears and bearings. To prevent wear damage consistent with low-quality fluid and ruptured fluid film, AMSOIL formulated Synthetic Multi-Vehicle ATF with high film strength (shear stability) and premium anti-wear/extreme-pressure additives (boundary film barrier). AMSOIL Synthetic Multi-Vehicle ATF protects transmissions during severe-duty service.

Friction Durability

Today's transmissions are smaller and must withstand higher horsepower and torque while delivering smoother shifts, all with longer fluid life recommendations. AMSOIL Synthetic Multi-Vehicle ATF is

PRODUCT LOOKUP GUIDES

Auto and Light Trucks
PowerSports Lookup
Small Engine Lookup
TRICO Heavy Duty

FILTER LOOKUP GUIDES

Vintage Vehicle
Heavy Duty Lookup

OIL COMPARISONS

Motorcycle Oil White Paper
Performance Tests

CROSS REFERENCE GUIDES

Master Filter Cross
NGK Plugs and Wires

INSTALLATION INFO

By-Pass Filters
WIX Cabin Air Filters
MANN Cabin Air Filters

MISCELLANEOUS

Drain Interval Chart
Gear Lube Chart
Two-Cycle Chart
MSDS Sheets
Tech Service Bulletins

formulated with friction modifier additives that deliver outstanding clutch-holding capacity (static friction), torque-transfer ability (dynamic friction) and anti-shudder properties (slipping torque converter clutches).

Extended Fluid Service Life

Most drivers are unaware that transmissions commonly operate under severe service and require shorter fluid drain intervals. AMSOIL Synthetic Multi-Vehicle ATF is a long-life fluid capable of extended service intervals. It provides an extra margin of protection, especially when fluid change intervals are missed, during heavy use and even during abuse. Drivers can count on AMSOIL Synthetic Multi-Vehicle ATF to provide protection beyond conventional fluids.

APPLICATIONS

AMSOIL Synthetic Multi-Vehicle ATF is recommended for transmissions, hydraulics, power steering and other applications requiring any of the following specifications:

- GM DEXRON® III-H
- Ford MERCON® & MERCON V
- Chrysler ATF+4®
- Toyota Type T-III and T-IV
- Honda Z-1 (Not CVT)
- Diamond SP II & III (Mitsubishi/Hyundai/Kia)
- Mazda ATF-III, ATF-MV
- Subaru ATF, ATF-HP
- Nissan Matic D, J & K
- Idemitsu K-17
- BMW LA2634
- LT 71141
- Audi G-052-025-A2 & G-052-162-A1
- Volvo 97340
- MB 236.1, 236.2, 236.5, 236.6, 236.7, 236.9 & 236.10
- JWS 3309
- NAG 1
- ETL-7045E, ETL-8072B & N402
- Voith 55.6335.XX (G607, G1363)
- ZF TE-ML 03D, 04D, 09, 14A, 14B, 14C, 16L, 17C
- Allison C-4, TES 389
- Mopar AS68RC

Note: Not for use with CVT or Ford Type F applications.


SERVICE LIFE

Recommended for 50,000 miles in severe service* and 100,000 miles in normal service;* or per vehicle manufacturer-recommended intervals, whichever is longer.

*As defined by vehicle or transmission manufacturer

HEALTH & SAFETY

This product is not expected to cause health concerns when used for the intended application and according to the recommendations in the Material Safety Data Sheet (MSDS). MSDS's are available upon request at 715-392-7101 or [on our website](#). **Keep Out of Reach of Children.** Don't pollute. Return used oil to collection centers.

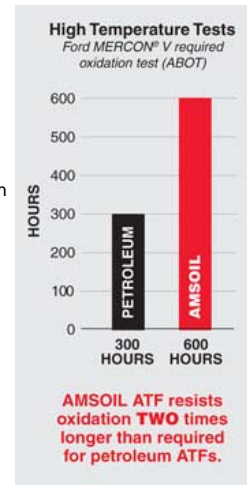

| TYPICAL TECHNICAL PROPERTIES | |
|---|-----------|
| AMSOIL Synthetic Multi-Vehicle Automatic Transmission Fluid (ATF) | |
| Kinematic Viscosity @ 100°C, cSt (ASTM D-445) | 7.6 |
| Kinematic Viscosity @ 40°C, cSt (ASTM D-445) | 38.9 |
| Viscosity Index (ASTM D-2270) | 168 |
| Flash Point °C (°F) (ASTM D-92) | 234 (453) |
| Pour Point °C (°F) (ASTM D-97) | -53 (-63) |
| FZG Load Stage Pass (ASTM D-5182) | 12 |
| Four Ball Wear Test, Scar in mm; 40 kg, 75°C, 1200 rpm, 1 hr (ASTM D-4172B) | 0.41 |
| Brookfield Viscosity @ -40°C, cP (ASTM D-2983) | 9800 |

AMSOIL ALSO OFFERS



Order Fax Line: (715)392-5225

ISO 9001:2008 Certified

Product Technical Services: (715)399-TECH

[AMSOIL Warranty](#) | [AMSOIL Racing](#) | [Clothing & Promotional Items](#) | [FAQs](#) | [AMSOIL Privacy Policy](#) | [Satisfied Customers](#) | [Site Map](#) | [Oil Analysis](#) | [Contact Us](#)

Copyright 1996-2011 AMSOIL INC. All rights reserved.