

<b>06</b>	AR49.10-P-7280EA	<b>Removing and installing exhaust system downstream of flanged connection</b>	<b>16.8.94</b>
-----------	------------------	--	----------------


**ENGINE 119.975**

*in MODEL 124.034*

**ENGINE 119.974**

*in MODEL 124.036*

Model 124.036 illustrated

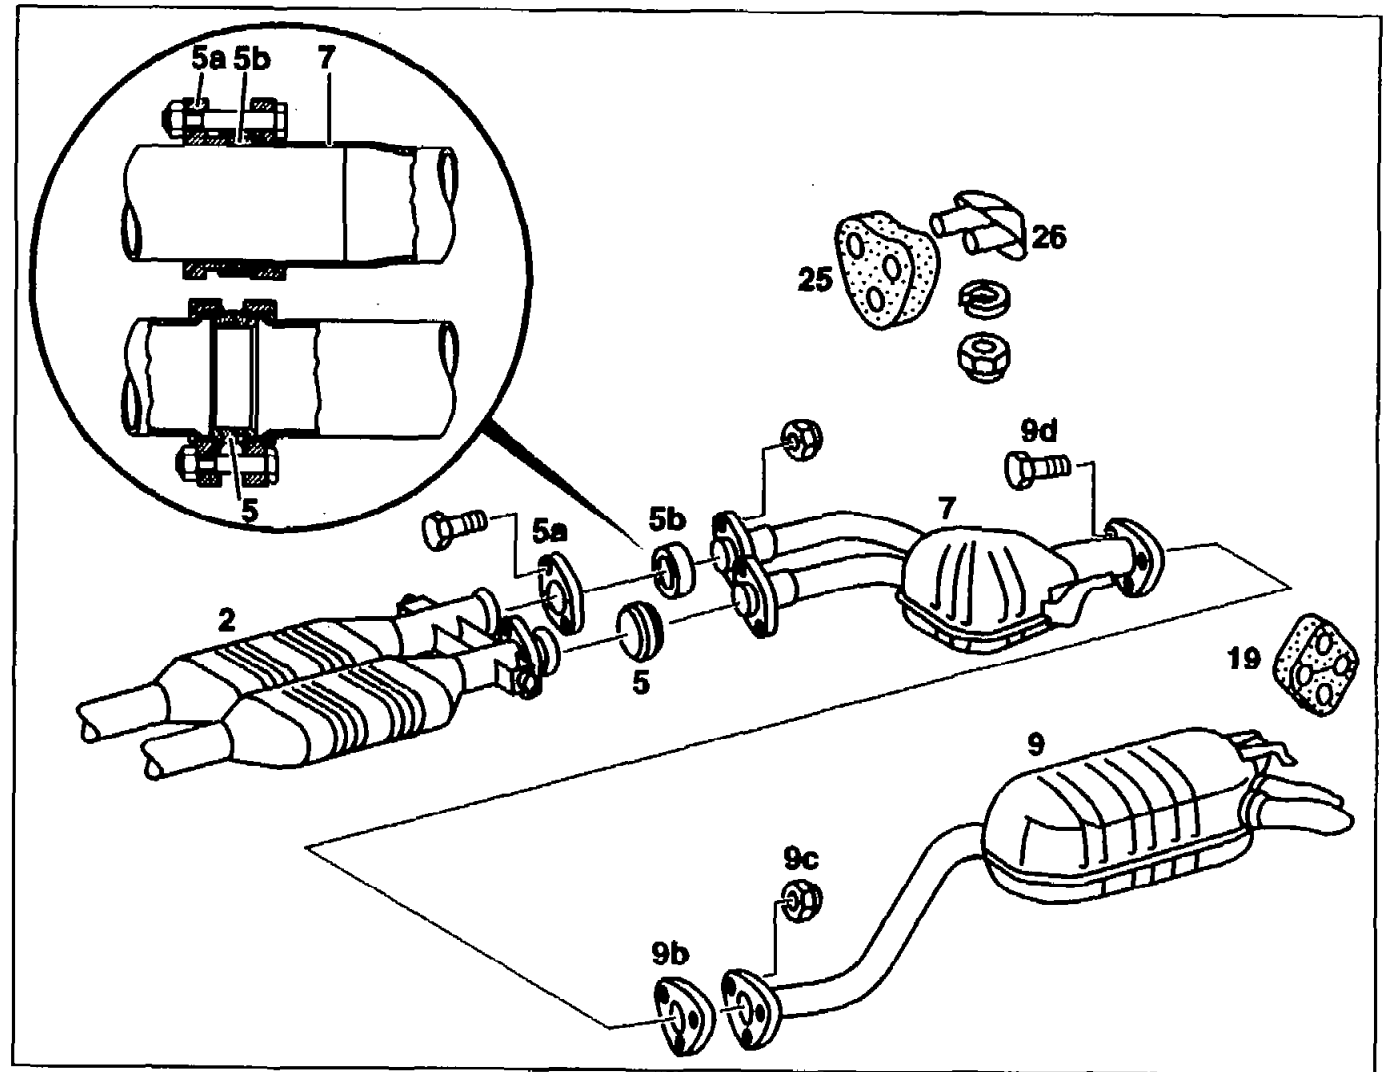

P49.10-0229-06

	<b>Removal, installation</b>		
--	------------------------------	--	--



1	Separate flanged connection of center muffler (7)/catalytic converter (2) or front exhaust system	Nm	BA49.10-P-1002-01A
2	Take off suspension plate (25) and tensioning plate (26)		
3	Detach rear muffler (9) from rubber ring (19)		WH58.30-P-1001-19A
4	Separate bolted connection (9c, 9d) between center and rear mufflers	Model 124.036 Replace gasket (9b)	
	<b>Checking</b>		
8	Check whether sintered seal (5), flange (5a), graphite seal (5b) can be re-used	replace, if necessary. Ensure correctly installed	
9	Check suspension plate (25) and rubber ring (19)	replace, if necessary	
10	Install in the reverse order		

Exhaust system

Number	Designation	Engine 119
BA49.10-P-1002-01A	Flanged connection to exhaust pipes	Nm 20

**Commercially available tools (see Workshop Equipment Manual)**

Number	Designation	Make (e.g.)	Order number
WH58.30-P-1001-19A	Hook wrench	Hazet	2184-2